

CARVER CLAMPS

T-SLOT CLAMPS

The Carver T-Slot Clamp is a popular solution for drilling, grinding, machining and planing applications. The secure holding power and unique design of the T-Slot offers a quicker and safer solution than using packers and bolts, eliminating any loose pieces in the working space.


The T-Slot is highly flexible and can be used at any angle, with the head creating a 'push' action when reversed.

With a height capacity of 0 - 1500mm (60") the T-Slot is available in standard and heavy duty applications, as well as with a choice of standard and long reach variations.





T-SLOT CLAMPS

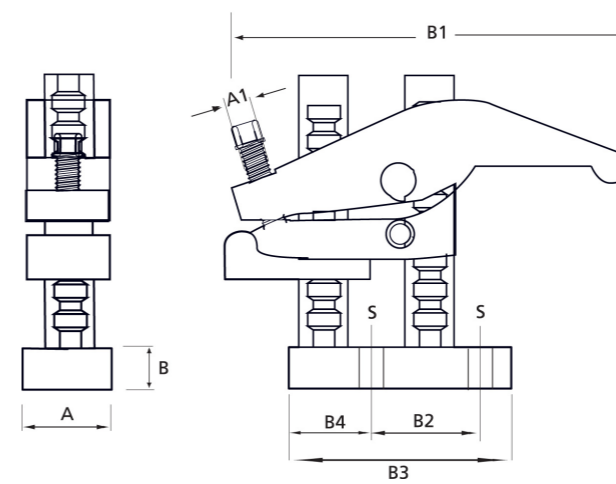

1 daN=1kgf / 1 daN=2.2lbf / 1 daN=10 N

HOLDS WORK SECURELY ON MANY MACHINES INCLUDING:

- ❖ Horizontal and vertical boring machines
- ❖ Planners
- ❖ Millers
- ❖ Lathes
- ❖ Power Presses
- ❖ Radial Drills

	Part No.	Model No.	Alternative Model No.	Clamping Height		Reach	Weight		
				mm (Inch)	mm (Inch)	mm (Inch)	kg		
Standard Duty 2270 daN	C301213	T400-4	T400-100	25 (1)	100 (4)	19 (3/4) OR with base reversed	2.3		
	C301227	T400-6	T400-150	25 (1)	150 (6)				
	C301228	T400-8	T400-200	62 (2.1/2)	200 (8)	35 (1.5/8)	2.6		
Standard Duty Long Reach 1600 daN	C301214	T600-4	T600-100	12 (1/2)	100 (4)	57 (2.1/4) OR with base reversed	2.7		
	C301215	T600-6	T600-150	12 (1/2)	150 (6)				
	C301216	T600-8	T600-200	50 (2)	200 (8)	73 (2.7/8)	3.0		
Heavy Duty 3630 daN	C301217	T402-6	T402-150	0 (0)	150 (6)	44 (1.3/4) OR with base reversed	6.3		
	C301218	T402-12	T402-300	0 (0)	300 (12)				
	C301219	T402-18	T402-450	150 (6)	450 (18)				
	C301220	T402-24	T402-600	300 (12)	600 (24)				
	C301221	T402-30	T402-750	450 (18)	750 (30)				
	C301222	T402-36	T402-900	600 (24)	900 (36)				
	C301223	T402-42	T402-1050	750 (30)	1050 (42)				
	C301224	T402-48	T402-1200	900 (36)	1200 (48)				
	C301225	T402-54	T402-1350	1050 (42)	1350 (54)				
	C301226	T402-60	T402-1500	1200 (48)	1500 (60)				
Heavy Duty 2500 daN	C301229	T602-6	T602-150	0 (0)	150 (6)	95 (3.3/4) OR with base reversed	7.3		
	C301230	T602-12	T602-300	0 (0)	300 (12)				
	C301231	T602-18	T602-450	150 (6)	450 (18)				
	C301232	T602-24	T602-600	300 (12)	600 (24)				
	C301233	T602-30	T602-750	450 (18)	750 (30)				
	C301234	T602-36	T602-900	600 (24)	900 (36)				
	C301235	T602-42	T602-1050	750 (30)	1050 (42)				
	C301236	T602-48	T602-1200	900 (36)	1200 (48)				
	C301237	T602-54	T602-1350	1050 (42)	1350 (54)				
	C301238	T602-60	T602-1500	1200 (48)	1500 (60)				
								117 (4.3/8)	17.7
									19.5

Model No.	A mm	A1 mm	B mm	B1 mm	B2 mm	B3 mm	B4 mm	S
T400-4 T400-6 T400-8	51	13 A/F Hex	16	162	54	96.25	31.75	For M12 bolt
T600-4 T600-6 T600-8				200				
T402-6 T402-12 T402-18 T402-24 T402-30 T402-36 T402-42 T402-48 T402-54 T402-60				76				
T602-6 T602-12 T602-18 T602-24 T602-30 T602-36 T602-42 T602-48 T602-54 T602-60	308							